

BOTTLE LEAKAGE TESTER

40LS2E-I

OPERATION

The versatility of this equipment makes it appropriate to be installed at the outlet of the injection, the blow moulding equipment or inserted in the bottling line.

CHARACTERISTICS

- Bottle conveyor belt (optional)
- Stainless steel metallic structure.
- Kit of 2 headstcocks(height-adjustable).
- Air accumulating deposit with pressure regulator and air filter.
- Detection of microleakages. Sensivity 0.2 mbar (pores up to 0.2 mm diamater and cracks in 20 litres).
- Programmable test time.
- Warning light alarm if consecutive defective bottles are encountered.
- Refusal unit with free roller conveyor Mod. 10TRL1000A400
- Display of production data, number of proper and defective bottles, level of leakages by each test and maximum allowable and reason of refusal (leakage or water inside).
- Programming by tight keyboard and working parameter display: test time, type of refusal, maximum allowable leakage level, type of bottles, etc.

SPECIFICATIONS


- **Production up to 1.000 u/h.**
- **Air consumption :** 500 NI/m.
- **Electric supply :** 220-240 Vac. 50/60 Hz.
- **Dimensions:** Vid. Lay-out

OTHER EQUIPMENTS

- **Weight-in-a-box testers.**
- **Automatic packaging equipments with thermo-sealing.**
- **Bottle arranging desk and palletising robot.**
- **Bottle conveyors.**
- **Handle applying equipment on the neck of bottles..**



LAY-OUT

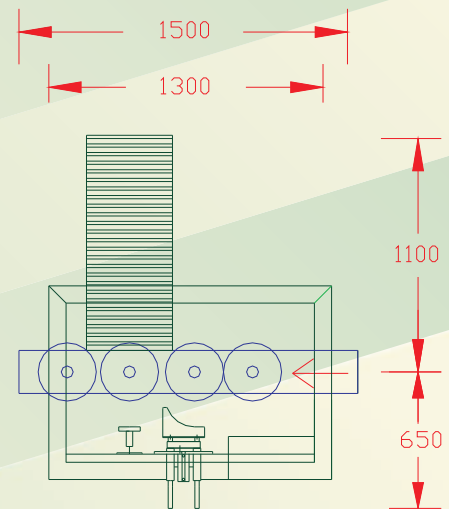

Specifications may change without prior notice. Ref:03-06-ES



AND & OR®

S.A.



Blas Infante s/n. Av. - La Ladrillera Industrial Area - Odiel St.nº 3, 5, 7 y 9.
41100 CORIADEL RIO (Seville) - Post Office Box, 31
Telephone: 34 - 95 - 477 33 02 / 92 00 - Fax: 34 - 95 - 477 42 44

E-mail: andyor@andyor.com
<http://www.andyor.com>